

Raptor Addressable Weatherproof Sounder Beacon (ZRAPB/R & ZRAPB/W)



Description


The Raptor addressable sounder with beacon has a coverage pattern of W-3.0-8.7 and the sounder part has 16 tones selectable at the control panel. It has a flash rates between 0.33Hz and 1.5Hz

It has been designed to make an “electronics free” first fix and is available in red or white.

Features

- ✓ Complies with EN54 Pt 3 Type B & EN54 Pt 23
- ✓ Available in Red or White Plastic
- ✓ 16 Tone patterns (site selectable)**
- ✓ Suitable for surface mounting only
- ✓ Housed in UL V0 flame retardant ABS
- ✓ 3 x 20mm cable entries (2 top, 1 bottom)
- ✓ First fix, wire to back box technology
- ✓ Flashing rate 0.33Hz - 1.5Hz

Dimensions & Weight

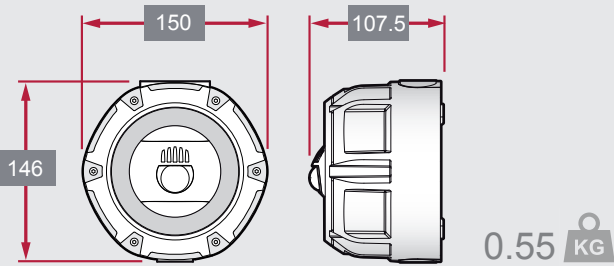

Technical Specification

Model	ZRAPB/R	ZRAPB/W
Part No.	42-637	42-638
Voltage	17 - 28V DC	
Quiscent Current	1.5mA	
Alarm Current	18 - 43mA	
Flash Colour	White	White
Flash Frequency	0.33Hz - 1.5Hz	
Body Colour	Red	White
Sounder Type	B	
IP Rating	IP65 (certified to IP33C)	
Operating Temperature	-25°C to 70°C	
Sound Output @ 1m	*96.9dB +/- 3dB	
Size mm	150 x 146 x 107.5	
Weight	550g	

* This applies to TONE 0 in reverberant conditions.

** Approved tones are Tone 0 and Tone 8.

Coverage

