


CODE: **AWO229 v.1.0/I**  
 NAME: **Enclosure 17/EXP/SAT/G3**

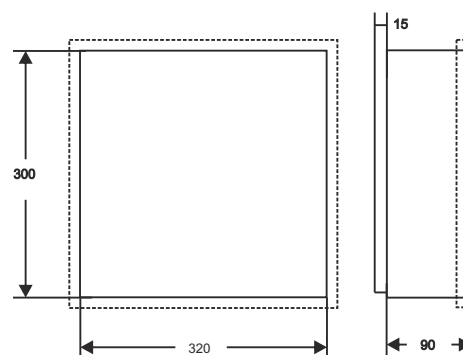

## APPLICATION

### 1. Modules:

**SATEL:** INT-E, INT-PP.

### 2. Buffer power supply units:

**SATEL:** APS-412.

**PULSAR:** PSB251215, PSB351225, PSB501235, PSB751250.

## TECHNICAL PARAMETERS

<b>Dimensions:</b>	<b>internal:</b> W=320, H=300, D=90 <b>external:</b> W1=325, H1=305, D1=105 [mm, +/-2]
<b>Weight net/gross:</b>	3,00kg / 3,30kg [ +/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Operating environment:</b>	2nd environmental class, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 1,0mm, corrosion protection, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	2 x microswitch: opening of the enclosure, 0,5A@50V/DC max. NC/NO - normally closed contacts / normally open
<b>Closing:</b>	screwed x2
<b>Notes:</b>	distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges
<b>Certification, declaration:</b>	RoHS, in accordance with the EN50131 standard, Grade 3