


# NVR16-128RFAN(3U)

## 128CH 16MP NVR, NDAA-compliant, Face Recognition with Alarms and RAID

Provision-ISR NVR16-128RFAN(3U) is an easy-to-install solution suitable for big-sized installations (up to 128 channels). The device features 16 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project. All hardware components, including the Raid, are validated to meet the demands for reliable high-definition surveillance. This model complies with NDAA demands and ensures that your devices are cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime.

**128**  
CH

**16**  
MP

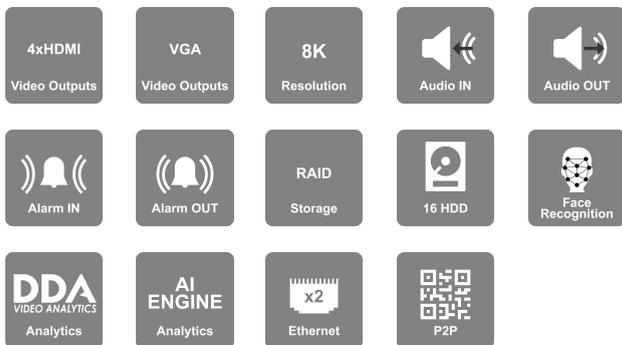

### MAIN FEATURES

- NVR16-128RFAN(3U) Video Input:
  - 128 Channels Video Output:
  - 4 x HDMI – (8K+4K+FHD)
  - VGA Recording:
  - 128CH 16MP Real-Time
  - FPS: 3200 (PAL) / 3840 (NTSC) Playback:
  - Local: 16Ch Simultaneously
  - Remote: 16Ch Simultaneously Audio:
  - Input: 1CH + IPC Inputs
  - Output: 1CH + IPC Output
  - 2 Way Audio Alarm:
  - Input: 24+IPC
  - Output: 4+IPC
  - Storage:
  - 16 x SATA (Up to 8TB each)
  - 2 x E-SATA (Up to 8TB each)
  - RAID: (0/1/5/6/10) Support Network:
  - 2 x RJ-45: 10/100/1000Mbps PTZ/Keyboard:
  - Network PTZ Support
  - 1 x RS-485 Keyboard Support Power Supply:
  - AC100-240V Analytics: AI by IPC:
  - All Analytics Supported by the camera AI By NVR:
  - Up to 8Ch DDA1 (Sterile Area/Line Crossing) or
  - Up to 4Ch Face Detection + Recognition or
  - Up to 16Ch Face Recognition Based on FW Version: v1.4.7
- Features subject to firmware version changes



<https://staging2.provision-isr.com>

## SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	128Ch Over Network
Output	HDMI1 (8K 30/60Hz, 4K, 1080P, 1280x1024) (When the resolution of HDMI1 output is 8K, HDMI2 is unavailable) HDMI2: 4K, 1080P, 1280x1024, 1024x768 HDMI3: 4K, 1080P, 1280x1024, 1024x768 HDMI4: 1080P, 1280x1024, 1024x768 VGA: 1080P 1280x1024, 1024x768 (VGA and HDMI1 output the same video source)
View Mode	Independent*, Up to 32ch Per Monitor (When enabled, NVR based analytics are disabled)
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 16MP ; 4Ch - 12MP ; 9/16Ch - 1MP ; 32Ch - D1 ; 64Ch - D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1k $\Omega$ ) + IPC Inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 k $\Omega$ ) + IPC Outputs
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition (Up to 16 CH), LPR, Thermal (Limited Support). Advanced Face Recognition Mode: Supports 4 Non-AI IPCs and performs face detection and recognition.
Analytics Channels (IPC Based)	128Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	Up to 8Ch DDA1 (Sterile Area/Line Crossing) or Up to 4Ch Face Detection + Recognition or Up to 16Ch Face Recognition (or their combinations)
Face Recognition Rate	36 Faces per second (16Ch supported)
Bandwidth	

**Incoming**

768Mbps

<b>Outgoing</b>	768Mbps
<b>Record/ Main Stream</b>	
<b>Real-Time Recording</b>	128CH 16MP Real-Time
<b>Record Type</b>	Video / Video + Audio
<b>Recording Modes</b>	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
<b>16MP</b>	3840FPS(NTSC)/3200FPS(PAL)
<b>12MP</b>	3840FPS(NTSC)/3200FPS(PAL)
<b>8MP</b>	3840FPS(NTSC)/3200FPS(PAL)
<b>5MP and lower</b>	3840FPS(NTSC)/3200FPS(PAL)
<b>Master stream over network</b>	Up to 128CH@Recording Resolution
<b>Substream</b>	
<b>Resolution substream</b>	Depends on IPC
<b>Remote view</b>	
<b>Max Channel View</b>	640Ch (Limited to Outgoing Bandwidth Capacity)
<b>Remote Applications</b>	
<b>User Access</b>	128 Users online with Professional Authority Management
<b>Mobile App</b>	Provision Cam2 for iOS/Android
<b>PC/Mac Software</b>	Ossia VMS Standard / Enterprise
<b>Plug-in free Web-Browser</b>	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
<b>Plug-in based Web-Browser</b>	Internet Explorer
<b>Playback</b>	
<b>Local</b>	16Ch
<b>Remote</b>	16Ch

# NVR16-128RFAN(3U)

<b>Search Mode</b>	DDA Object, Smart Search, LPR, Time-Slice, Time, Event, POS
--------------------	-------------------------------------------------------------

## Backup

<b>USB</b>	2 USB 2.0 Port + 1 USB 3.0 Port
------------	---------------------------------

<b>Backup Format</b>	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
----------------------	--------------------------------------------------------------

## Alarm

<b>Alarm-in</b>	24+IPC
-----------------	--------

<b>Alarm-out</b>	4+IPC
------------------	-------

## Storage

<b>HDD</b>	16
------------	----

<b>E-Sata Support</b>	2
-----------------------	---

<b>RAID</b>	Yes (0/1/5/6/10)
-------------	------------------

## PTZ

<b>Connection</b>	Via Network
-------------------	-------------

<b>Supported Controls</b>	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
---------------------------	----------------------------------------------------

<b>RS-485</b>	Yes (C06 Keyboard Connection)
---------------	-------------------------------

## Network

<b>Ethernet</b>	2x1000/100/10Mbps self-adaptive Ethernet interface with Fault Tolerance / Dual Network Configuration
-----------------	------------------------------------------------------------------------------------------------------

<b>Protocols</b>	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
------------------	-------------------------------------------------------------------------------------------------------------------

<b>ONVIF</b>	Full Device Support (Profile T/G, ONVIF Version 20.12)
--------------	--------------------------------------------------------

## PoE

<b>PoE Ports</b>	N/A
------------------	-----

<b>Speed</b>	N/A
--------------	-----

<b>Standard</b>	N/A
-----------------	-----

# NVR16-128RFAN(3U)

<b>CCTV Mode</b>	N/A
<b>Total Power</b>	N/A
<b>Max. Power Output (Per Ch.)</b>	N/A
<b>Others</b>	
<b>Power Supply</b>	AC100-240V
<b>Power consumption (No HDD)</b>	50W
<b>Dimension</b>	W437xD483xH143mm
<b>Operation Temperature</b>	0°C~50°C