

NVR

Provision-ISR NVRs seamlessly integrate with IP cameras, ensuring efficient video storage and playback via network connections. These versatile devices offer flexibility in system design, eliminating the need for direct IP camera connections and simplifying wiring. Offering Face Recognition and Advanced Video Analytics (DDA™), select models feature alarm inputs and Check Point Quantum IoT Nano agent for enhanced security.





NVR8-641600R(2U)

64CH 8MP NVR with alarms and RAID

Provision-ISR NVR8-641600R(2U) is an easy-to-install solution suitable for big-sized installations (up to 64 channels). The device features 8 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project. All hardware components, including the Raid, are validated to meet the demands for reliable high-definition surveillance.

64
CH

8
MP

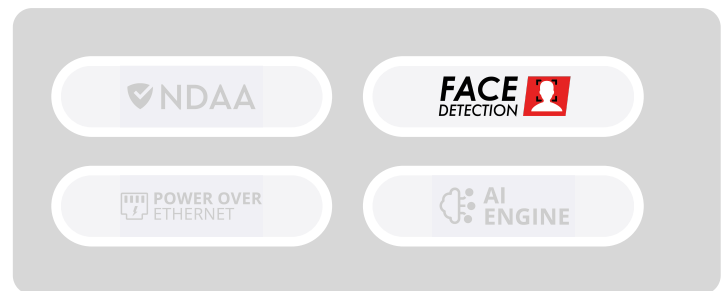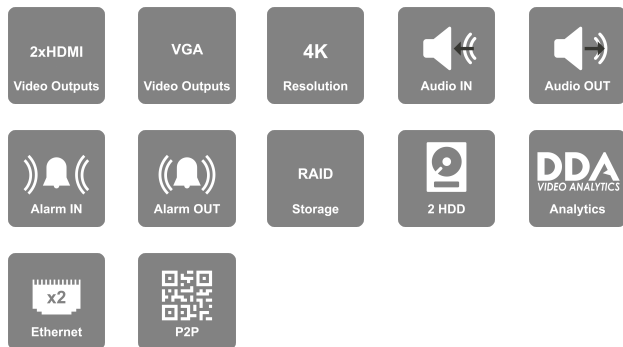

MAIN FEATURES

- NVR8-641600R(2U) Video:
- Input: 64 Channel Support 64 Channel Standard Connection (Via RJ-45 Network Port)
- Output: HDMI1 (4K 30/60Hz, 1080P1280x1024), HDMI2 + VGA (1280x1024, 1080P) Bandwidth:
- Incoming: 320Mbps
- Outgoing: 320Mbps Decoding Support:
- H.265/H.264 Analytics:
- Camera Tampering, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, LPR Recording:
- 64CH 8MP Real-Time
- FPS: 1600 (PAL) / 1920 (NTSC) Playback:
- Local: 16Ch Simultaneously
- Remote: 32Ch Simultaneously Audio:
- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output 2 Way Audio Alarm:
- Input: 8+IPC
- Output: 4+IPC Storage:
- 8 x SATA (Up to 8TB each)
- 2 x E-SATA (Up to 8TB each)
- RAID: (0/1/5/6/10) Support USB Port:
- 2 USB 2.0 Port + 1 USB 3.0 Port Network:
- 2 x RJ-45: 10/100/1000Mbps Each



SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	No
Video	
Video Input	64Ch Over Network
Output	HDMI1 (4K 30/60Hz, 1080P1280x1024), HDMI2 + VGA (1280x1024, 1080P)
View Mode	Independent*, Up to 32ch Per Monitor (When enabled, NVR based analytics are disabled)
Fish-Eye Dewarp	Web Only
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 8MP ; 4Ch - 2x8MP + 2x5MP ; 9/16Ch - 1MP ; 32Ch - 20x1MP + 12xD1 ; 64Ch - D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC Inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC Outputs
Compression	Specs
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, LPR
Analytics Channels (IPC Based)	64Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	N/A
Face Recognition Rate	N/A
Bandwidth	
Incoming	320Mbps
Outgoing	320Mbps

Record/ Main Stream	
Real-Time Recording	64CH 8MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	N/A
8MP	1920FPS(NTSC)/1600FPS(PAL)
5MP and lower	1920FPS(NTSC)/1600FPS(PAL)
Master stream over network	Up to 64CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	320Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	20 Users Online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	16Ch
Remote	32Ch
Search Mode	DDA Object, Smart Search, LPR, Time-Slice, Time, Event, POS
Backup	

USB	2 USB 2.0 Port + 1 USB 3.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
Alarm	
Alarm-in	8+IPC
Alarm-out	4+IPC
Storage	
HDD	8
E-Sata Support	2
RAID	Yes (0/1/5/6/10)
PTZ	
Connection	Via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	Yes (C06 Keyboard Connection)
Network	
Ethernet	2x1000/100/10Mbps self-adaptive Ethernet interface with Fault Tolerance / Dual Network Configuration
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)
PoE	
PoE Ports	N/A
Speed	N/A
Standard	N/A
CCTV Mode	N/A
Total Power	N/A
Max. Power Output (Per Ch.)	N/A

NVR8-641600R(2U)

Others	
Power Supply	AC100-240V
Power consumption (No HDD)	15W
Dimension	W430xD445xH97mm
Operation Temperature	0°C~50°C

DIMENSIONS

